


Overview

Wall and ceiling loudspeaker

6 W / 100V

certified
EN 54-24

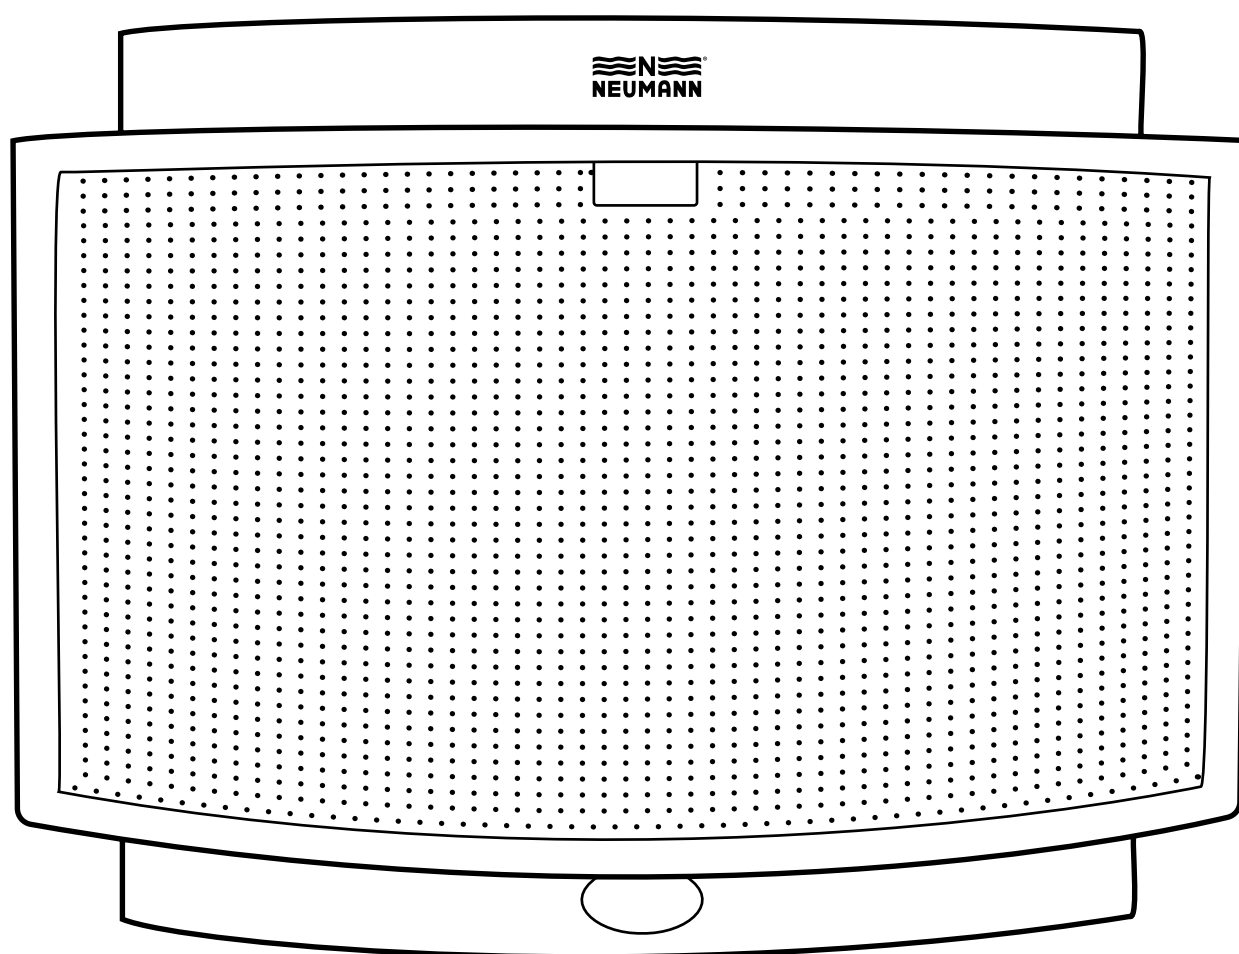

4 77X X

Wall and ceiling loudspeaker 6 W / 100V
Edition 01-2020 / Page 1
© Neumann Elektronik GmbH

Ver. 10.09.20 17:03


NEUMANN

Established Neumann Elektronik quality

clear syllable comprehensibility



excellent music reproduction

available with and without integrated volume control

horizontal and vertical mounting

especially well suited for communication, public address and evacuation systems

theft protection guaranteed by appropriate components

certified according to EN 54-24

4 77X X

Wall and ceiling loudspeaker 6 W / 100V
Edition 01-2020 / Page 2
© Neumann Elektronik GmbH

Ver. 10.09.20 17:03



The wall and ceiling loudspeaker is particularly suitable for speech and music reproduction in communication, public address and evacuation systems due to its vented housing made of white ABS.

The symmetrical shape allows horizontal and vertical mounting. Screws and dowels are included in the delivery. A theft protection is guaranteed by appropriate components.

The loudspeaker is characterized by a good music reproduction and clear syllable comprehension and is available with or without integrated volume control.


Art.-Nr.	4 778 6	without integrated volume controller
	4 779 7	with integrated volume controller

Mechanical data

Material	ABS
Weight	approx. 1,6 kg
Housing colour	pure white (RAL 9010)
Dimensions	330 mm x 240 mm x 83 mm
Connection	4-pole ceramic terminal

Electrical data

Nominal power	6 W /100 V
Transformer adjustment (100 V)	6; 3; 1,5 W
Impedance	1667 Ω
Transmission range (-10 dB)	80 Hz bis 19 kHz
Average sound pressure (1 W / 1 m)	93 dB
Maximum sound pressure (1 m)	101 dB
Sound pressure EN (1 W / 4 m)	76 dB
Maximum sound pressure EN (4 m)	86 dB
Transmission angle	H 180° / 180° / 180° / 51° 500 / 1000 / 2000 / 4000 Hz V 180° / 180° / 180° / 68°



↓↑




↓↑



↓↑




↓↑



↓↑



↓↑

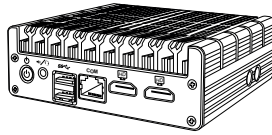

NE 3 358 9



WEB Server



Config / state



SNMP / MIB

Com Server Application

Gateway Application

Speechbox* NE 5 067 8


SIP-Trunk* NE 5 065 6

Phone Server* NE 5 034 2


MODBUS / TCP-IP* NE 5 068 9

CANopen* NE 3 373 6

←
→
NIS



↓↑



UK₀ II Adapter

NE 3 334 3


and / or



PA Control II

NE 3 343 3

and / or



Analog adapter x8

NE 3 331 0

and / or



Plug-in unit analog

NE 2 390 4

↔



PC Call station
„all-in-one“

NE 1 296 8




MTSD Call station

NE 1 045 0



MTSD IP42
Call station


NE 1 085 4



Intercom
call station
(rack-mounted)


NE 1 278 8

NE 1 279 9



Call station
(panel-mounted)

NE 1 28X X¹⁾



Crane call station

NE 1 156 3



WFD IP
Call station


NE 1 5XX X¹⁾



WFD IP Compact
call station

NE 1 87X X¹⁾

¹⁾: various models; product numbers
depending on individual requirements.

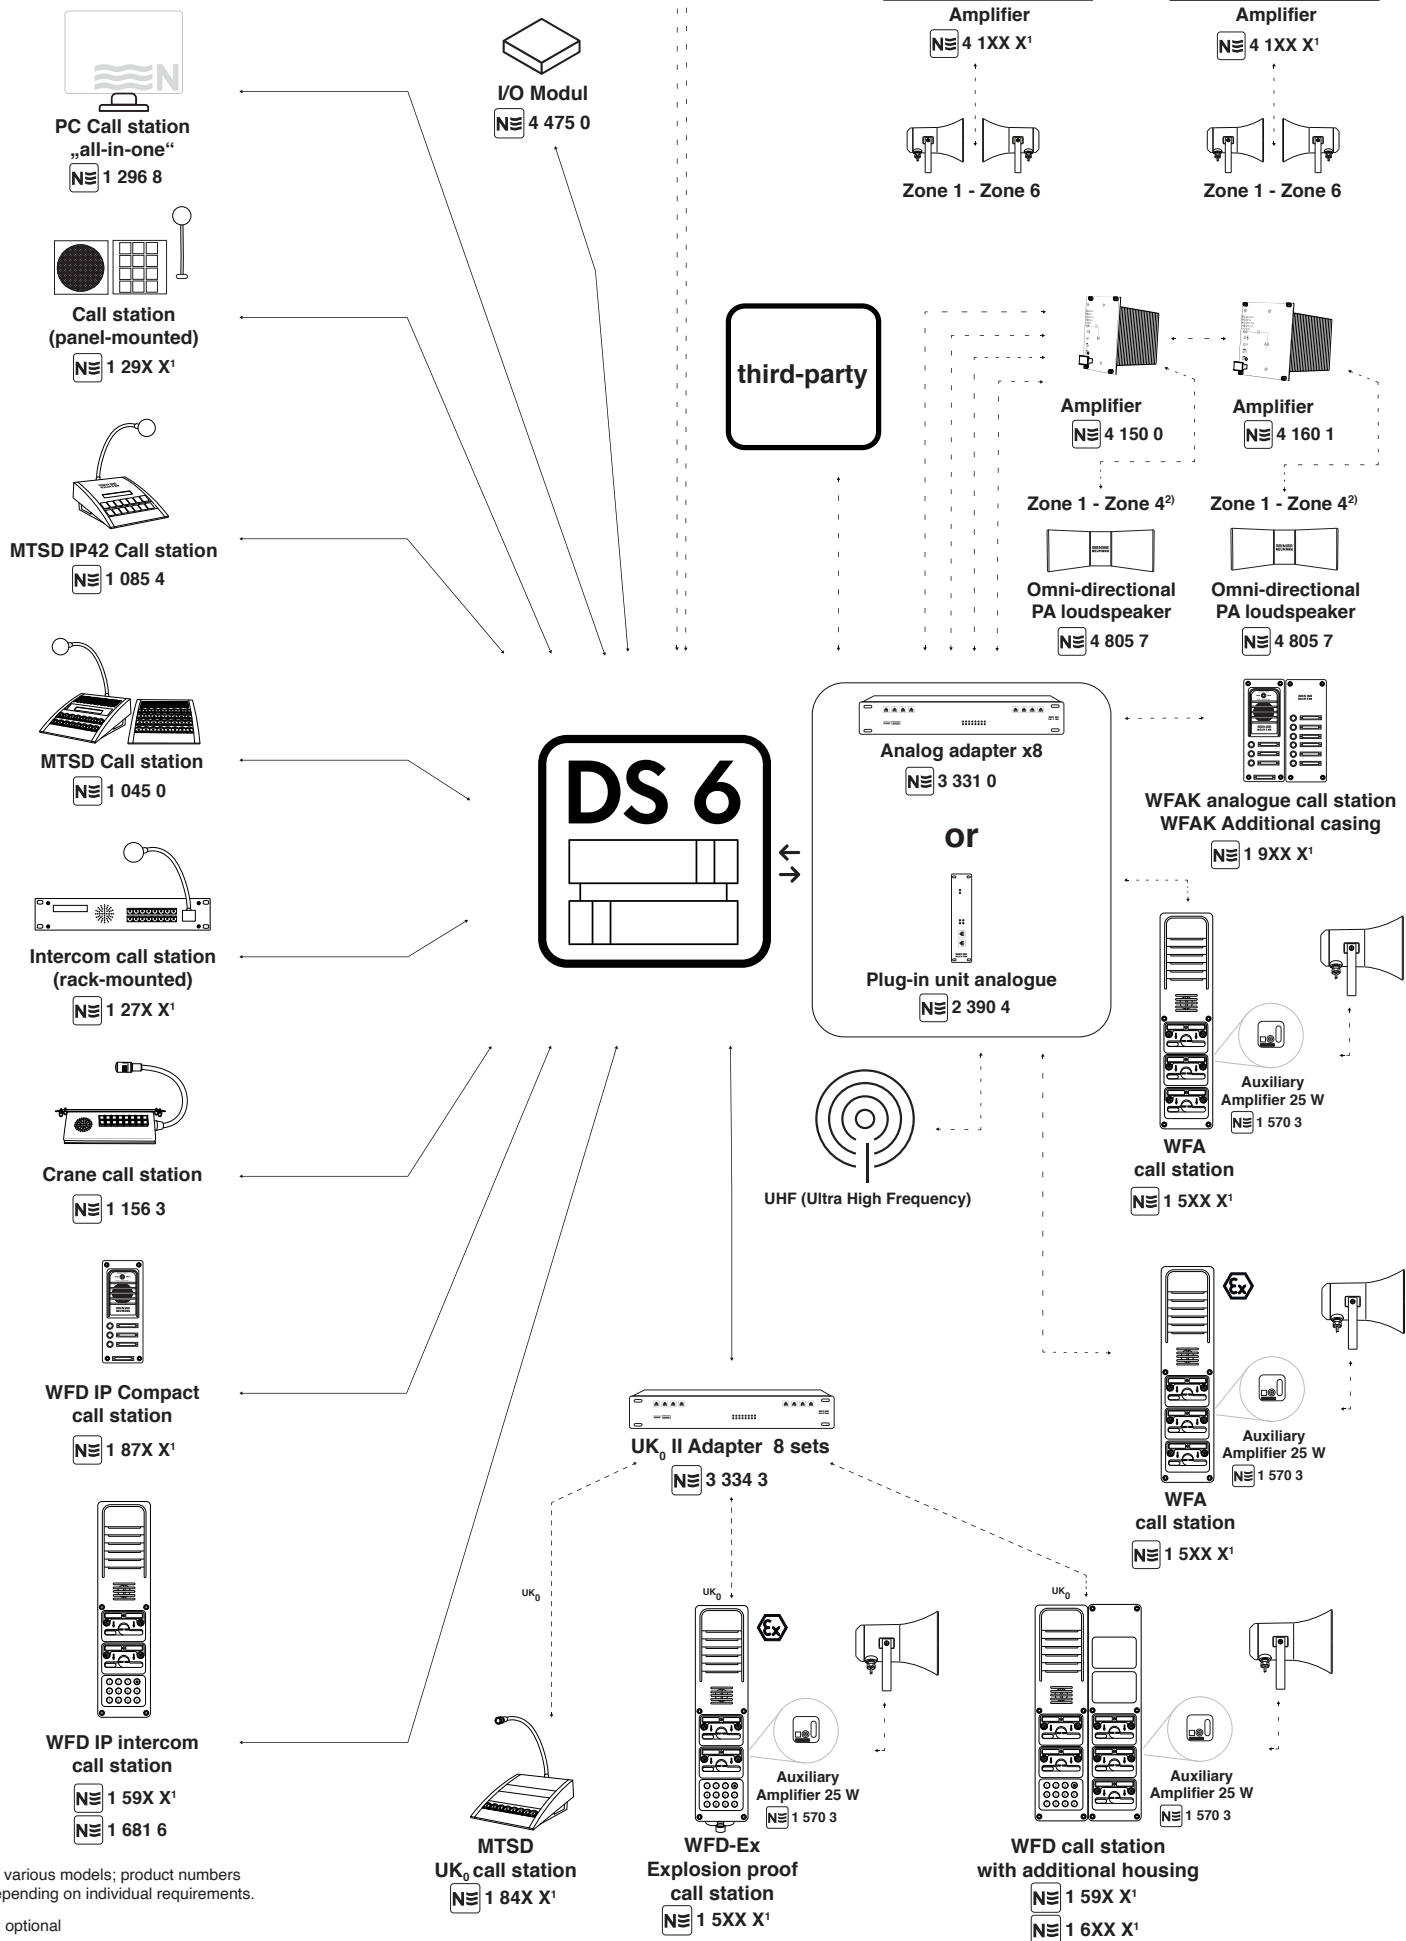

¹) : various models; product numbers depending on individual requirements.

²) : optional



Neumann Elektronik GmbH

**Lahnstrasse 31-33
45478 Mülheim an der Ruhr
Germany**

**info@neumann-elektronik.com
www.neumann-elektronik.com**

4 77X X

Wall and ceiling loudspeaker 6 W / 100V
Edition 01-2020 / Page 6
© Neumann Elektronik GmbH

Ver. 10.09.20 17:03

NEUMANN